


ASSEMBLY INSTRUCTIONS

FRONT VIEW



SIDE VIEW




1. Open the upper snap profile (equipped with wall attachments)



2. Insert the print into the snap profile



3. Apply the Click-Clack profile to the bottom of the print then apply the wall/cable display.

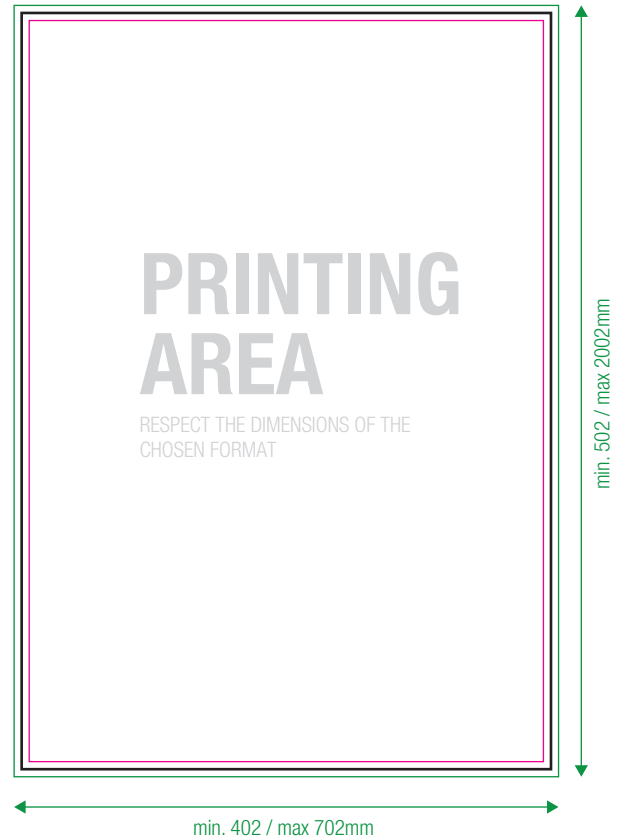

[youtube.com/StudioStandsSrl](https://www.youtube.com/StudioStandsSrl)
for the assembly video tutorial

— ABUNDANCE

— CUT

— SAFETY MARGIN
(Do not place important content
beyond this margin)

INFO FILE

Formats: .eps .pdf .jpg .tiff

Color profile: CMYK

Images: 100dpi - 1000dpi (for 1:10 scale files)

Fonts: converted into paths

Die path: only cutting path (where present)