



ASSEMBLY INSTRUCTIONS - example of configuration with 2 uprights




1. Join the base to the vertical pole, fixing the parts with the screw and Allen key supplied.




2. Thread 2 rings for each post (repeat the operation for both poles)



3. Lock the rings at the height by acting on the central knob with the Allen key supplied. (repeat the operation for both poles)

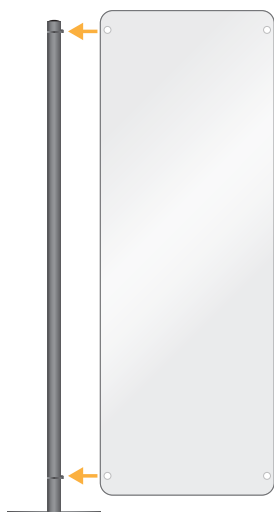

4. Insert the plexus panel into the appropriate shaping of the rings and act on the screw to lock in position

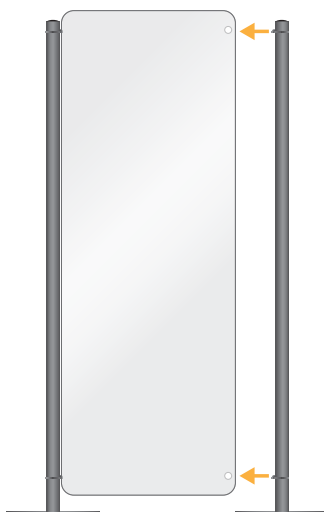

5. Repeat the operation with the second floor lamp



6. Position the divider according to your needs

INFO FILE

FORMATS:

.eps .pdf .jpg .tiff

COLOR PROFILE:

CMYK

IMAGES:

included within the file at at least 100dpi resolution in 1:1 scale or 1000dpi for 1:10 scale works

FONTS:

converted into paths

DIE PATTERN:

Keep ONLY the outermost path - all other paths must be removed

CUT MARKS/REGISTER/COLOR BARS/FILE INFO:

DO NOT insert inside the file



ABUNDANCE



CUT



SAFETY MARGIN

(Do not place important content beyond this margin)

704mm

1954mm

r. 50mm

GRAPHIC TEMPLATE - 1:1 Scale