



ASSEMBLY INSTRUCTIONS

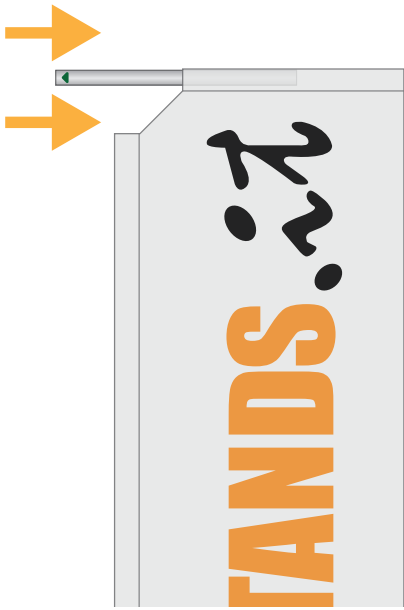

1. Insert the horizontal rod into the slot of the print.

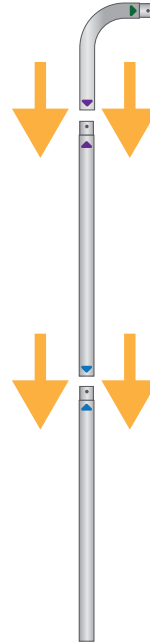

2. Assemble the vertical rod, simply by interlocking, following the numbering of the stickers on the tubulars

ATTENTION - the number of tubulars varies depending on the format chosen



3. Insert the vertical rod into the slot of the press and join the fitting with the horizontal rod inserted previously



4. Insert the fixing ring and lock in position by acting on the ring nut, then tension the flag by applying the cord present to the ring hook

NOTE

It is possible to accessorize Eolo Deluxe with various types of pedestal. See the section “OPTIONAL BASES” on our e-commerce.



[youtube.com/StudioStandsSrl](https://www.youtube.com/StudioStandsSrl)
for the assembly video tutorial

INFO FILE

Formats:

.eps .pdf .jpg .tiff

Color profile:

CMYK

Images:

included within the file at at least 100dpi resolution in 1:1 scale or 1000dpi for 1:10 scale works

Fonts:

converted into paths

Die path:

Keep ONLY the outermost path - all other paths must be removed

Crop marks/register/color bars/file info:


DO NOT insert inside the file

————— **ABUNDANCE**

————— **CUT**


————— **SAFETY MARGIN**
(Do not place important content beyond this margin)

EOLO DELUXE M

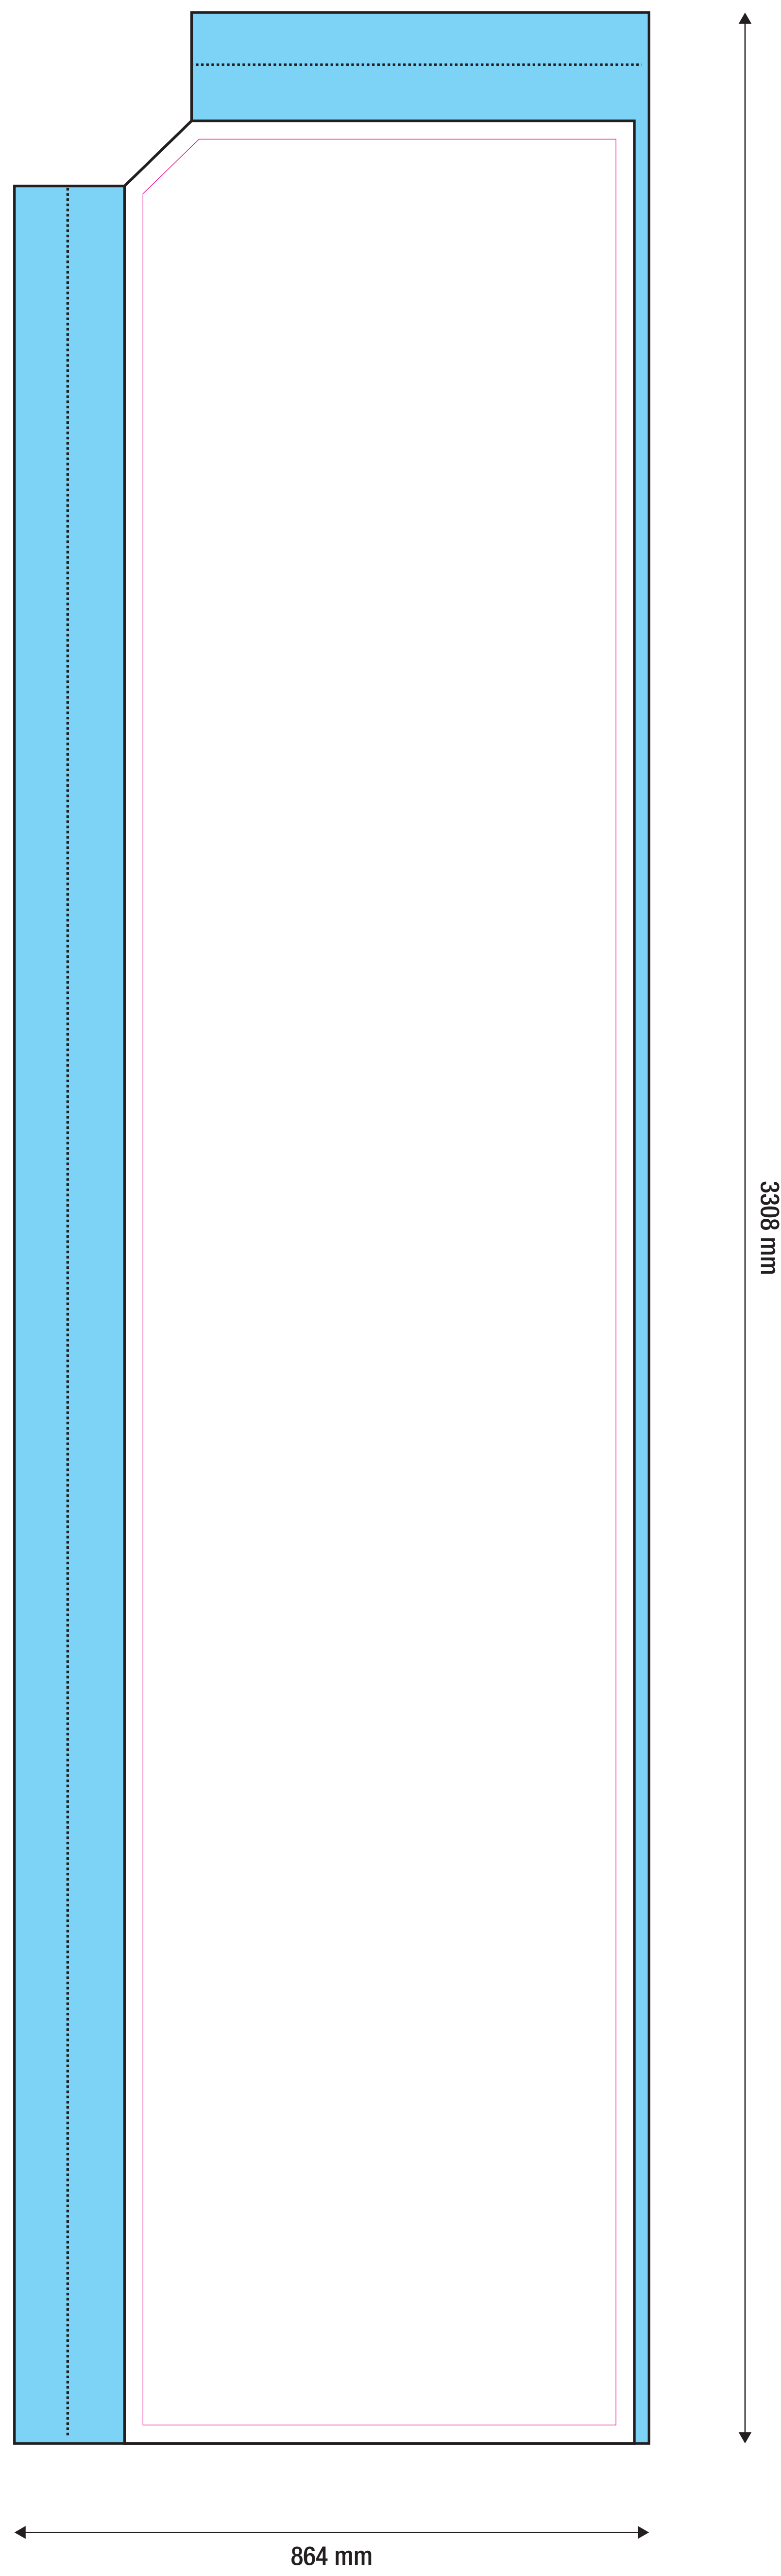

EOLO DELUXE L

GRAPHIC INSTRUCTIONS

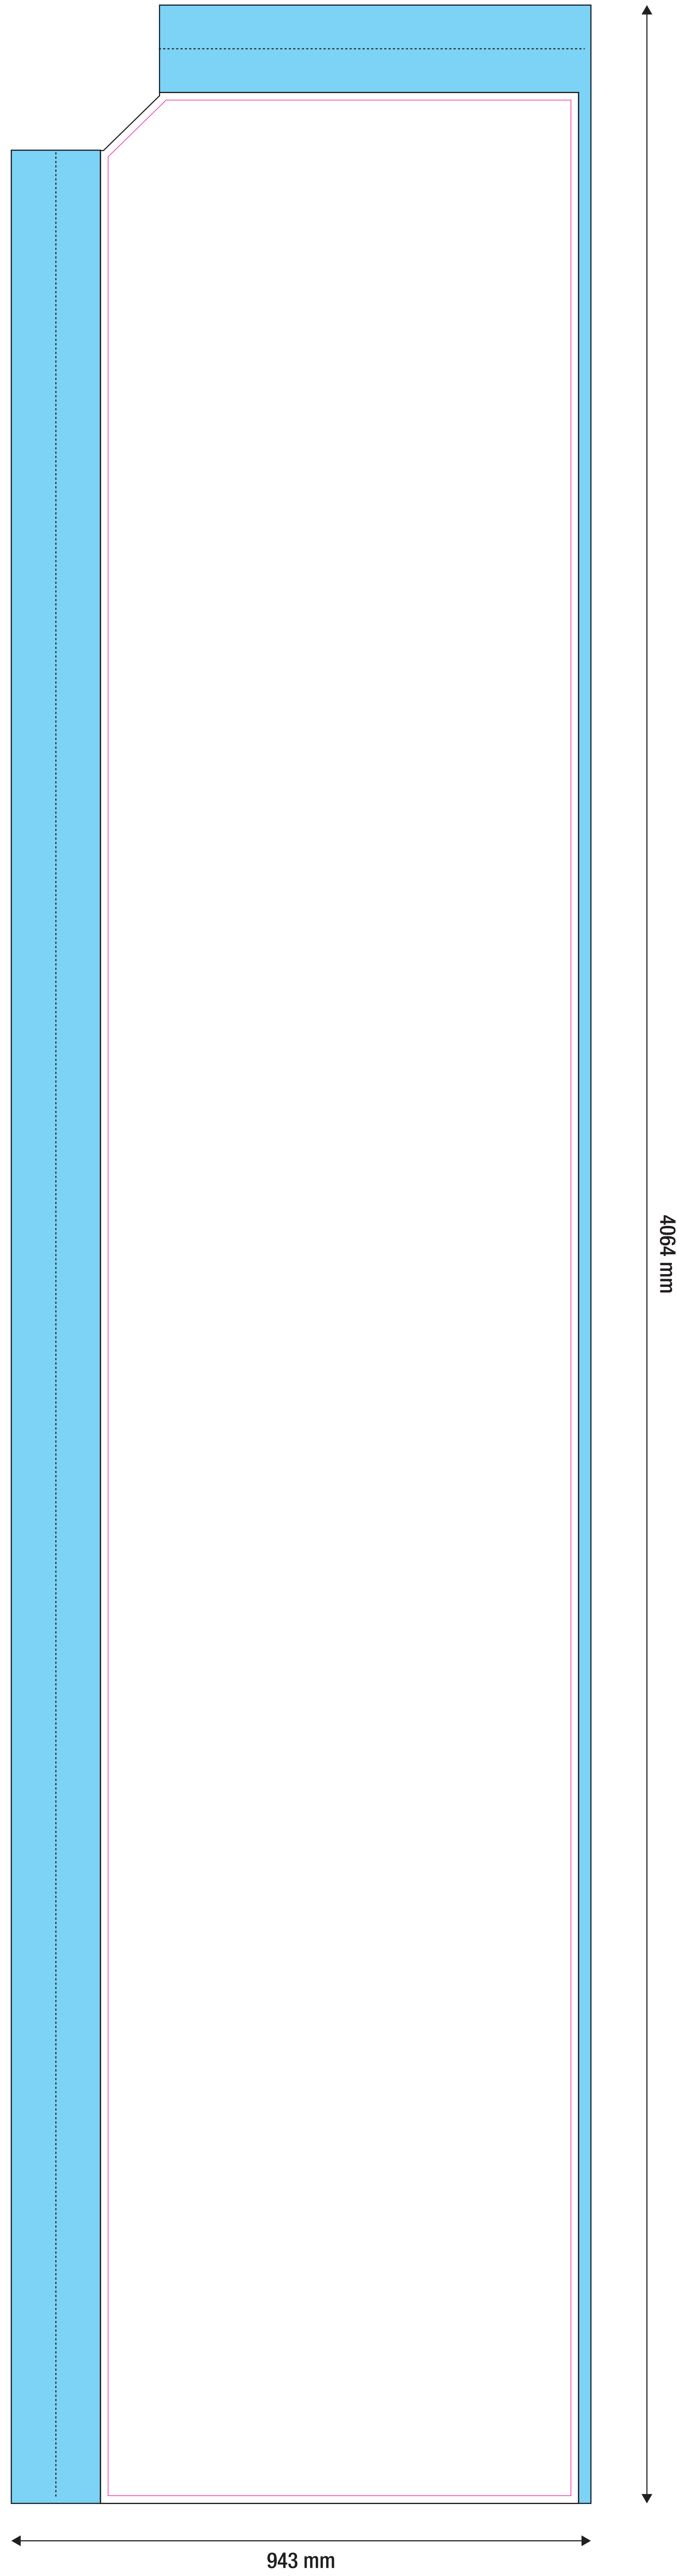

EOLO DELUXE XL

GRAPHIC INSTRUCTIONS

