


# ASSEMBLY INSTRUCTIONS



1. Compose the base of Flag Ventosa. Insert the pin into the hole and join it to the cap by screwing the parts together.



2. Compose the rod by joining the interlocking parts



3. Insert the flag pole into the slot of the print



4. Tension by fixing the lace to the appropriate hook

# INFO FILE

## Formats:

.eps .pdf .jpg .tiff

## Color profile:

CMYK

## Images:

included within the file at at least 100dpi resolution in 1:1 scale or 1000dpi for 1:10 scale works

## Fonts:

converted into paths

## Die path:

Keep ONLY the outermost path - all other paths must be removed

## Crop marks/register/color bars/file info:


DO NOT insert inside the file

————— **ABUNDANCE**


————— **CUT**

————— **SAFETY MARGIN**  
(Do not place important content beyond this margin)


1:1 SCALE TEMPLATE

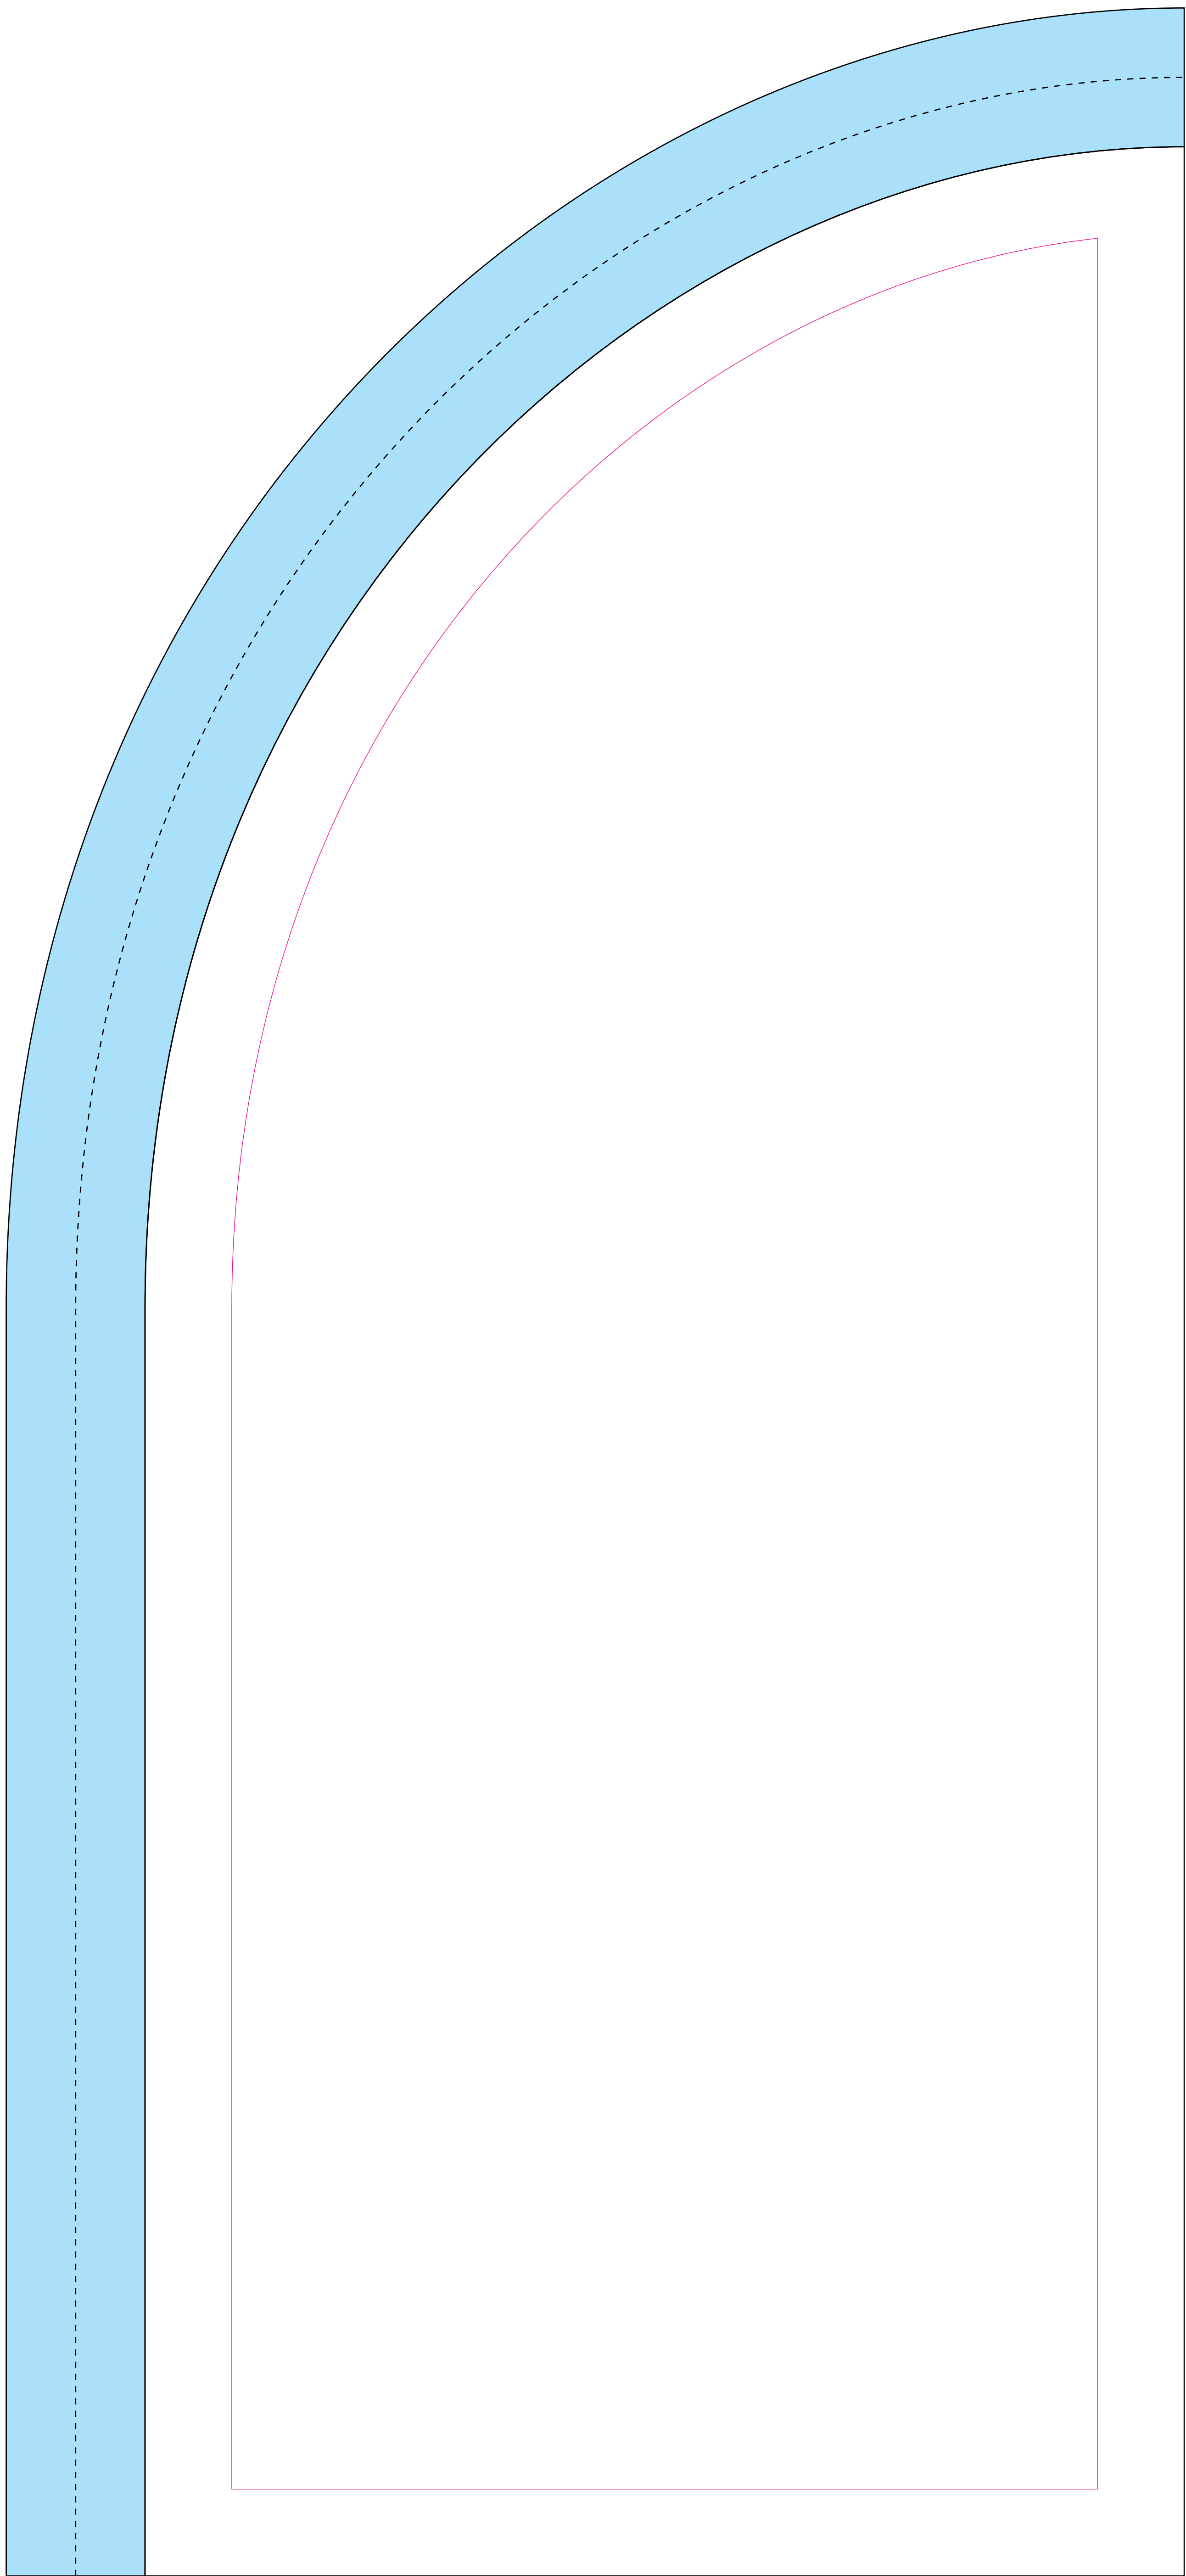

1:1 SCALE TEMPLATE

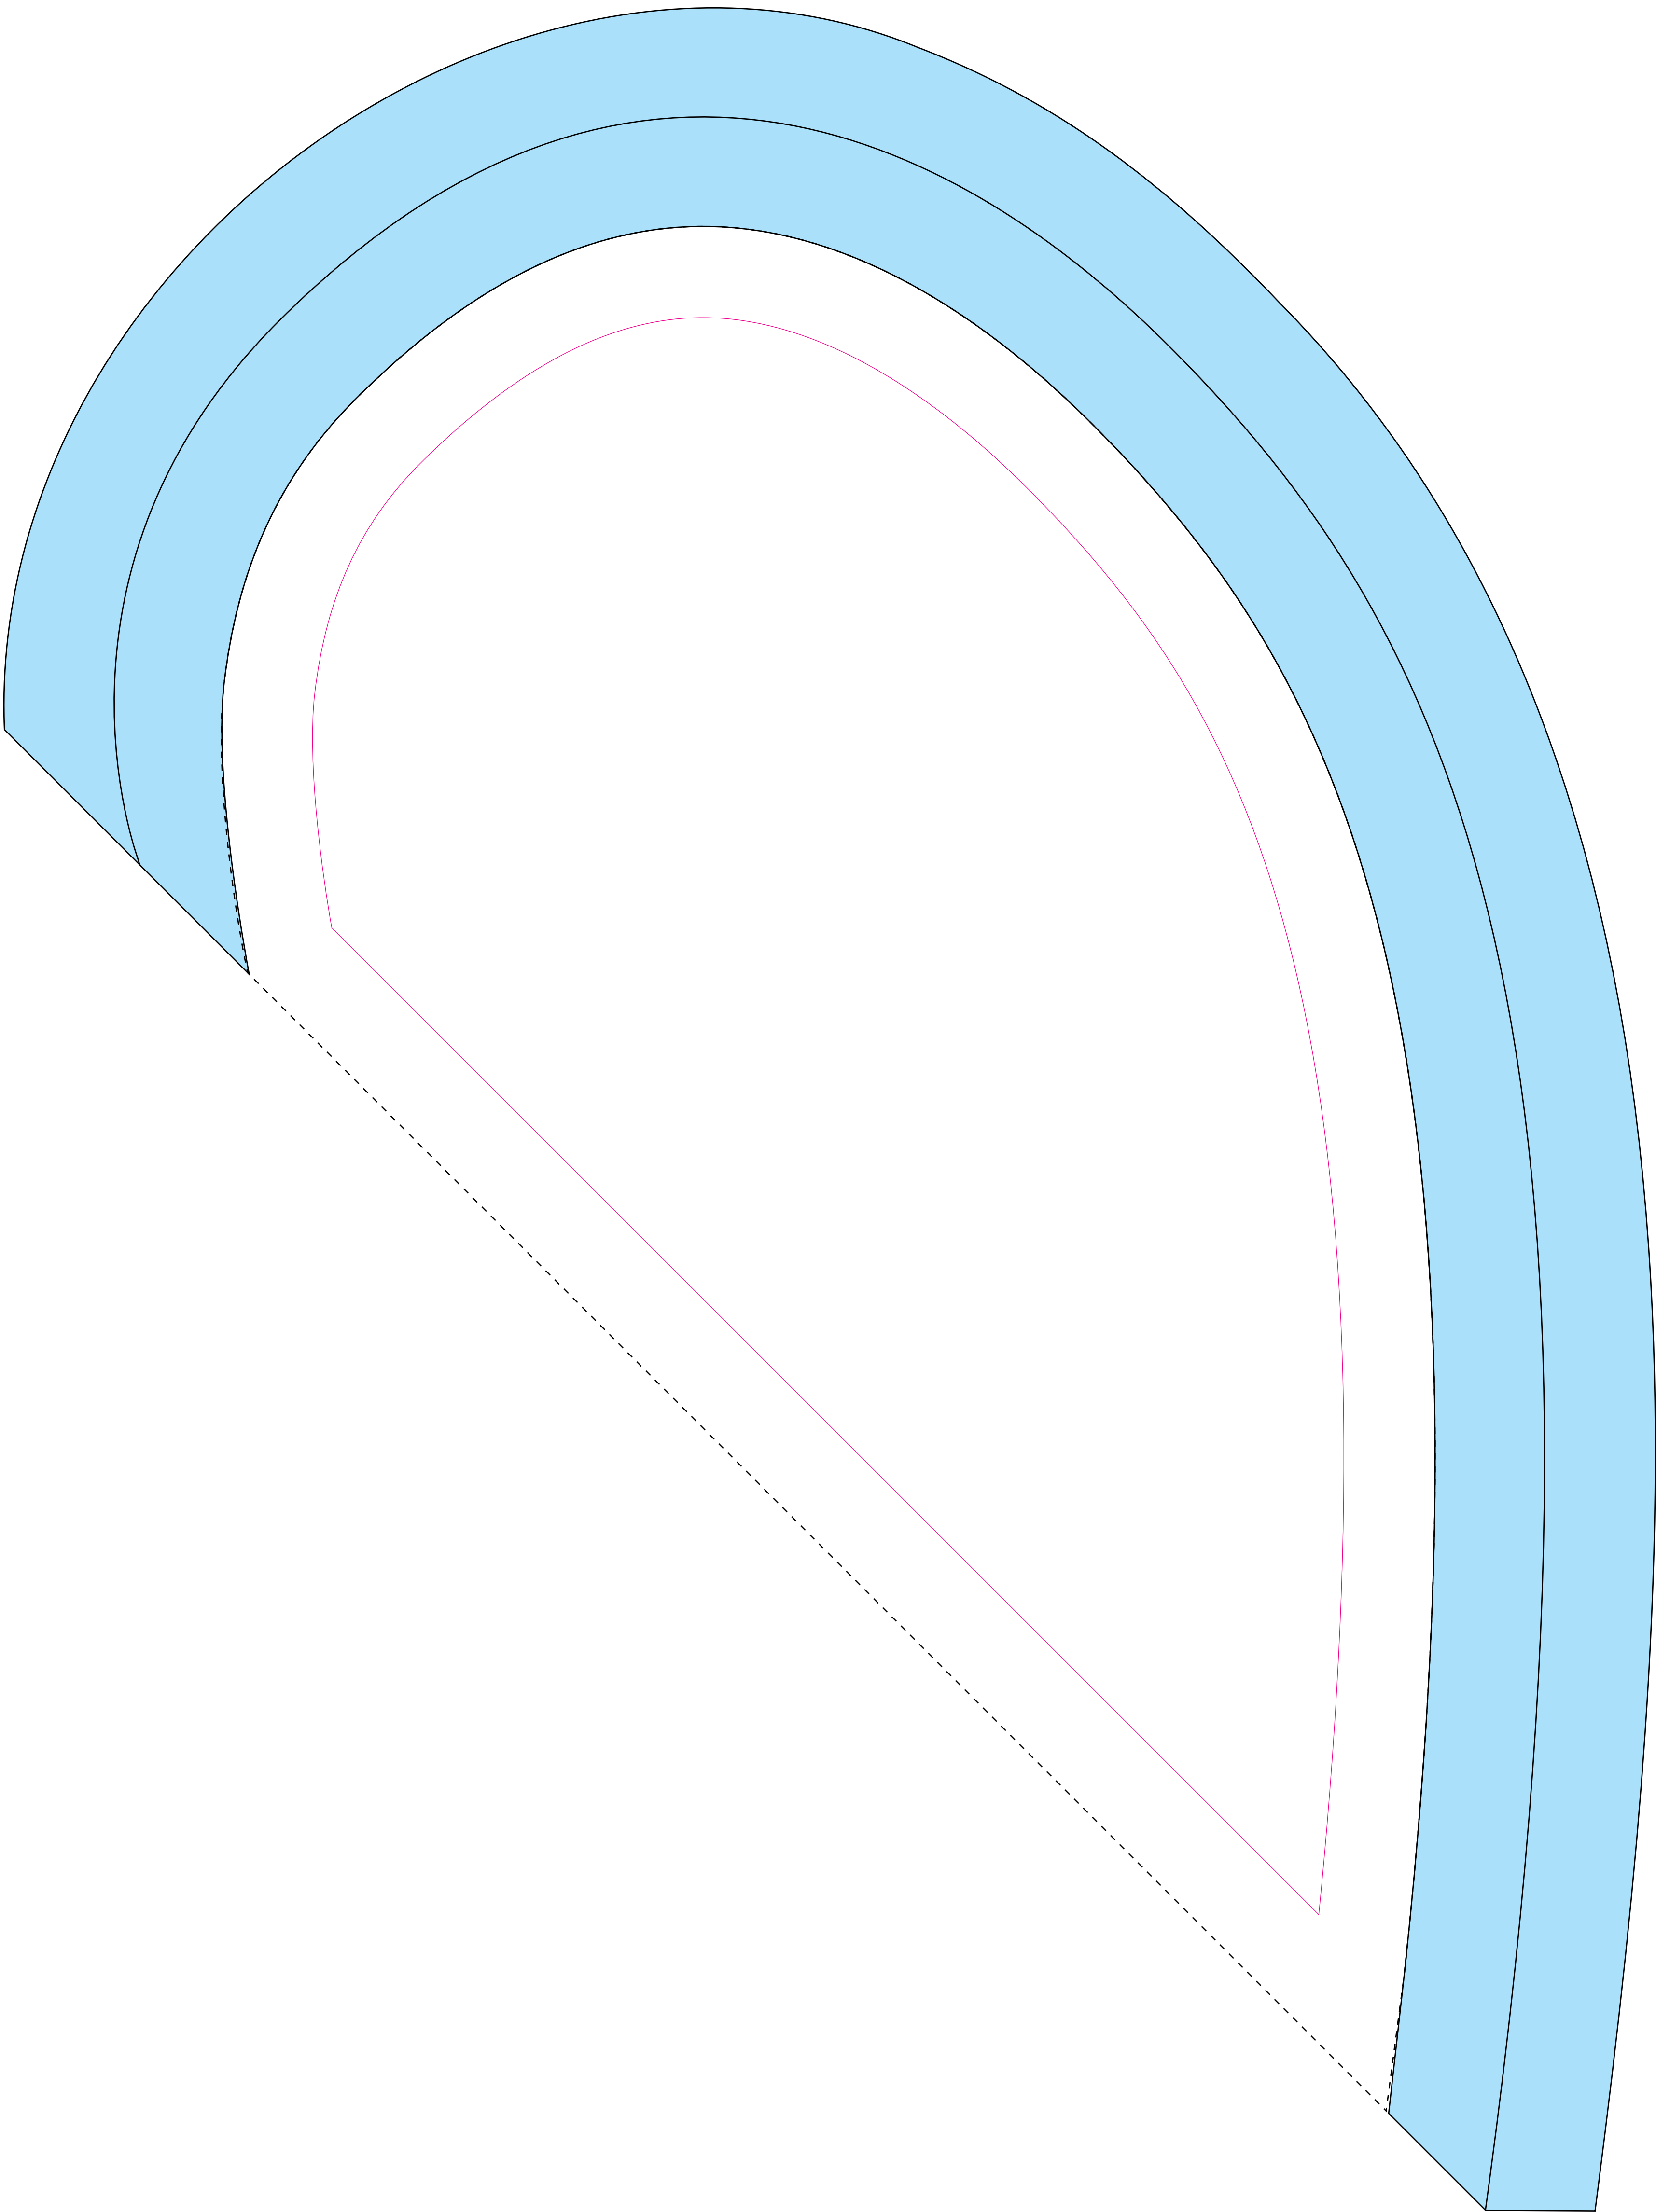

# 1:1 SCALE TEMPLATE

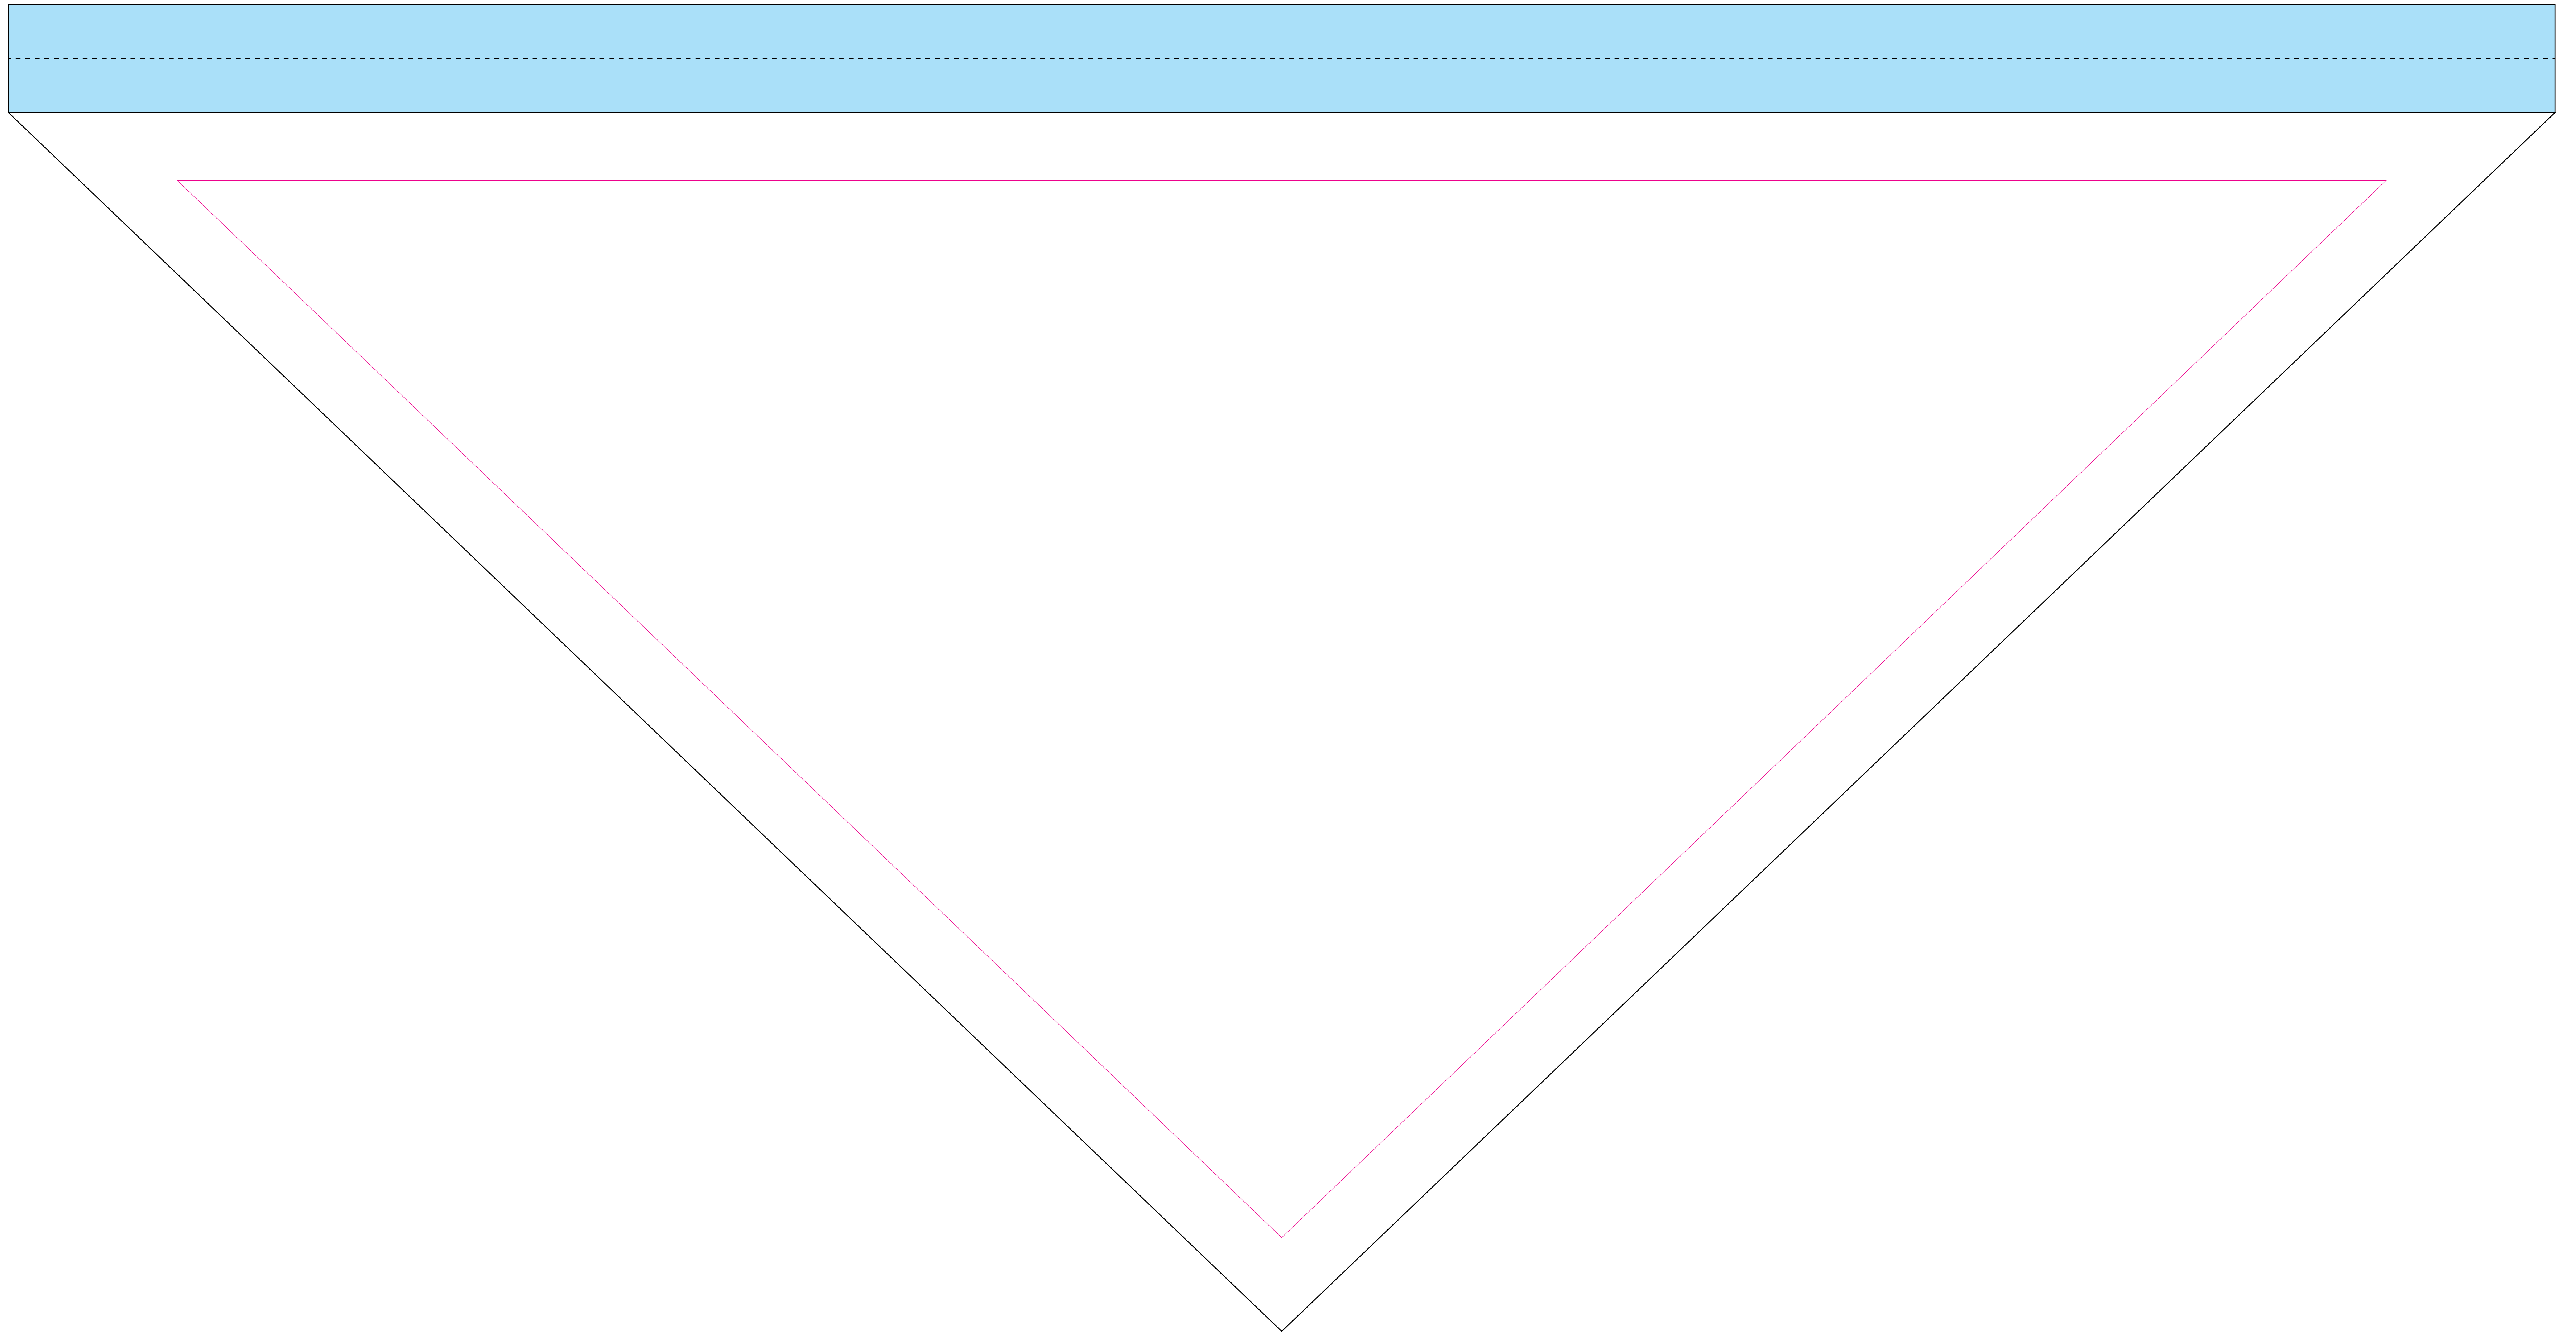

# 1:1 SCALE TEMPLATE

