




ASSEMBLY INSTRUCTIONS

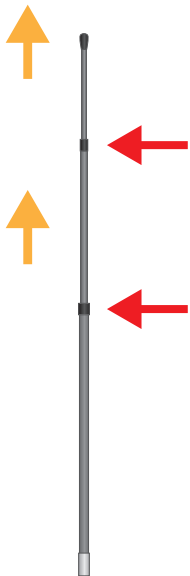

1. Extend the telescopic rod and act on the various sections to block the parts.

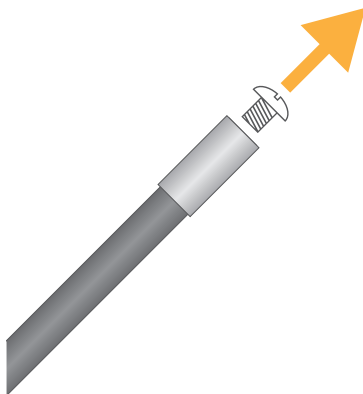

2. Remove the screw at the bottom of the telescopic pole.

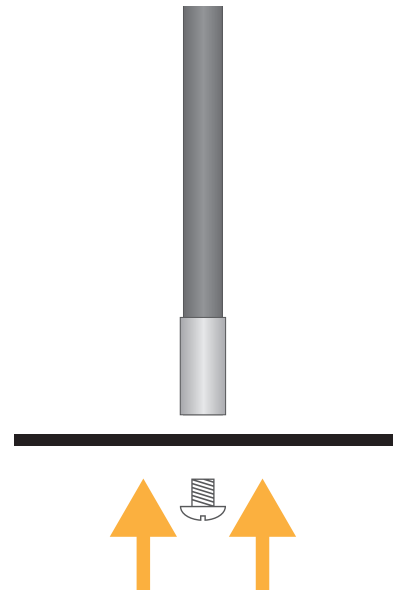

3. Insert the screw into the hole in the metal stand and attach the rod to the base.



3. Inserire la struttura nell'asola della stampa e fissare con le fettucce in velcro





NOTE

As an alternative to the standard base, it is possible to accessorise Goccia 2 with other types of pedestal
See the section “**OPTIONAL BASES**” on our e-commerce.



[youtube.com/StudioStandsSrl](https://www.youtube.com/StudioStandsSrl)
for the assembly video tutorial

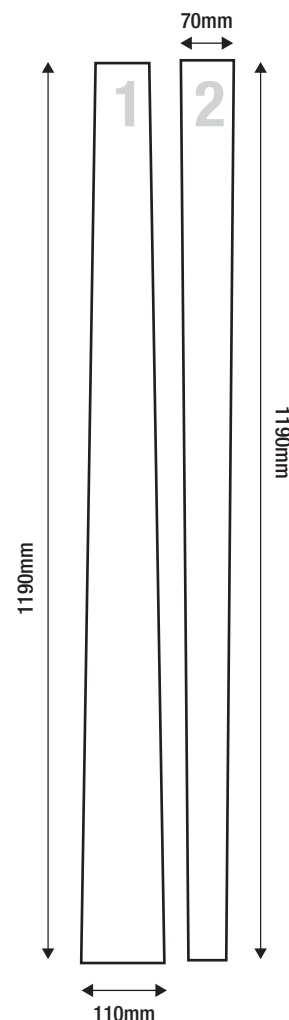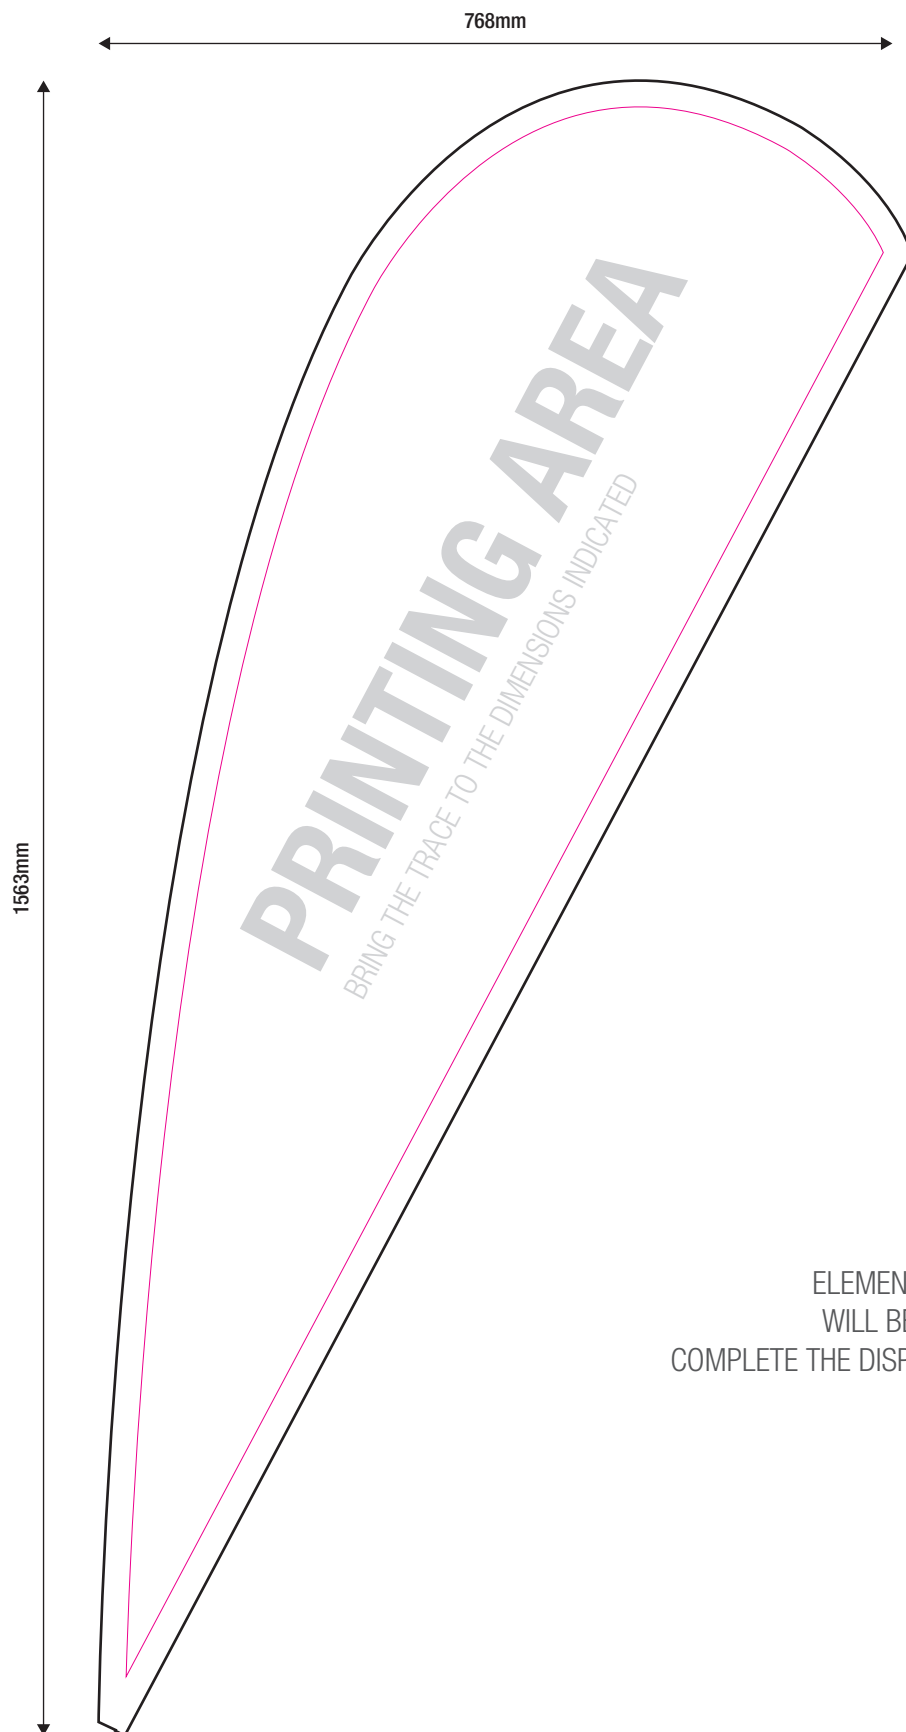

NOTE
ELEMENTS 1 AND 2
WILL BE USED FOR
COMPLETE THE DISPLAY SLOTH

- **ABUNDANCE**
- **CUT**
- **SAFETY MARGIN**
(Do not place important content beyond this margin))

INFO FILE

Formats: .eps .pdf .jpg .tiff
Color profile: CMYK
Images: 100dpi - 1000dpi (for 1:10 scale files)
Fonts: converted into paths
Die path: only cutting path (where present)